


PRG-125

Manual Nitrogen Regulator with Flowmeter - 3 L/min

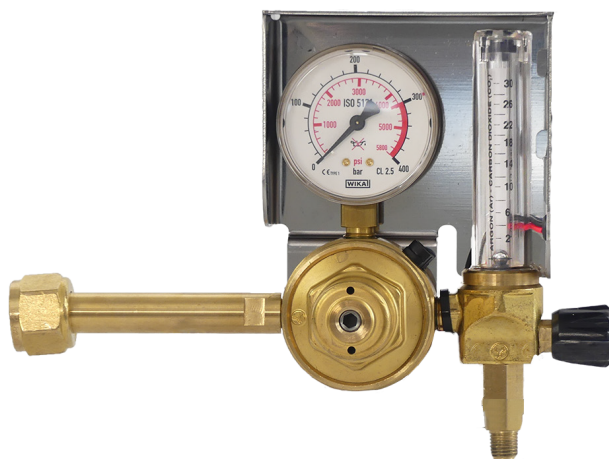

SPECIFICATIONS

- Inlet pressure: 300 bar
- Outlet pressure (pre-set): 3.5 bar
- Flow rate: 0 to 30 L/min
- Dimensions: 240 x 210 x 90 mm
- Weight: 1.7 kg

The PRG-125 is a regulator-flowmeter specifically designed for nitrogen purging during brazing in refrigeration and HVAC systems, as well as for inerting A3 refrigerant-charged systems during maintenance operations.

With the PRG-125, nitrogen consumption is optimized thanks to an adjustable flow range from 0 to 30 L/min.

FEATURES

- Inlet fitting with swivel nut – compatible with nitrogen cylinders (male type C fitting)
- Outlet fitting: 1/4" SAE male
- Stainless steel protective shroud
- Adjustable nitrogen flow control knob: 0 to 30 L/min
- Heavy-duty carrying case
- Made in Europe
- Assembled and quality-checked in France